


RX16FT-IS

Flush Mount Lift Rack

HUNTER
Engineering Company

SPECIFICATIONS

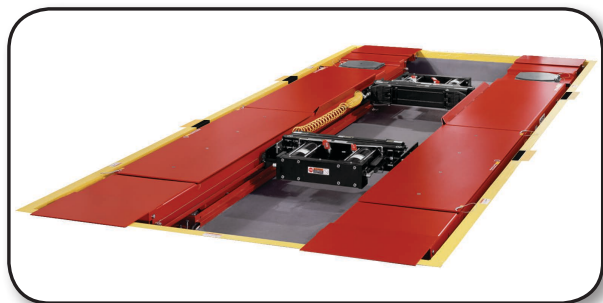

RX16FT-IS Shown

Site Specifications

| | |
|---------------------------|--|
| Substructure Requirements | Refer to 6367-T for full details |
| Power Requirements | 208-230 VAC, single phase power, 26 Amp |
| Air Supply Requirements | 90-150 PSI (6.2-10.3 bar) Jacks require 125 PSI (8.6 bar) for full capacity |
| Minimum Concrete Spec. | 3 in. (76 mm) thick, 3000 PSI (20,700kPa) rating |
| Maximum Floor Slope | 2 in. (51 mm) over 126 in. (3200 mm) |


Product Specifications

| | |
|---------------------------|-----------------------|
| Max. Vehicle Weight | 16,000 lbs. (7257 kg) |
| Max. Wheelbase | |
| General Service | 187 in. (4750 mm) |
| Two-Wheel Alignment | 182 in. (4623 mm) |
| Four-Wheel Alignment | 158 in. (4013 mm) |
| Alignment Height | All lock positions |
| Min. Four-Wheel Alignment | 88 in. (2235 mm) |
| Lifting Speed | 1 speed 60 seconds |
| Lowering Speed | 2 speed, 25 seconds |

MODEL FEATURES / DIMENSIONS

| Features | FT-IS |
|---------------------------------------|-------|
| 9000-lb Swing Air Jacks (2) | ✓ |
| Two-Speed Lowering | ✓ |
| FIA Fully Integrated Alignment | ✓ |
| POWER SLIDE | ✓ |
| INFLATION STATION | ✓ |

| Dimension | |
|--------------------|-------------------------------------|
| Outside Width (W1) | 92.5 in. 2350 mm |
| Inside Width (W2) | 40 in. 1016 mm |
| Length (L) | 231.375 in. 5877 mm |
| Runway Width (R) | 26 in. 660 mm |
| Raised Height (H1) | 72 in. 1829 mm |
| Depth (H2) | 14.75 to 15.25 in. 375 to 387 mm |

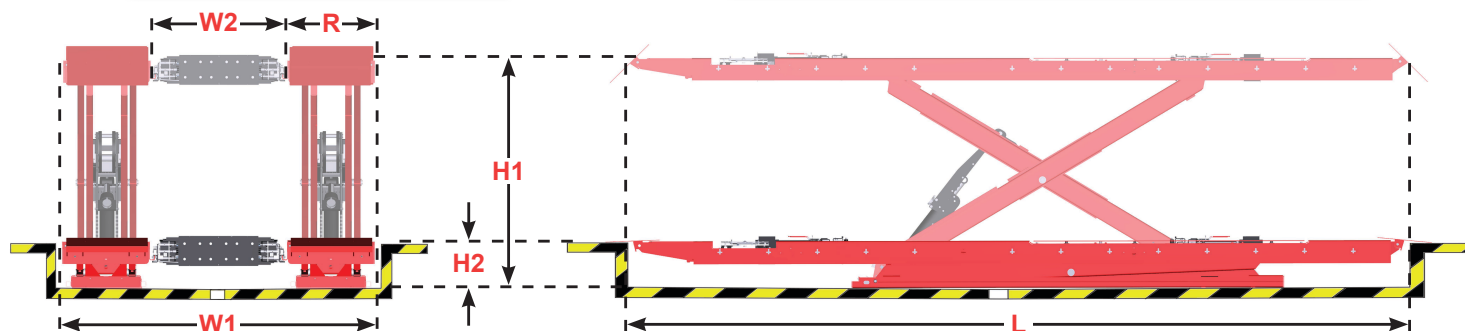

Continued on Page 2

For lift rack information visit:
www.hunter.com/lift-racks

For general inquiries visit:
www.hunter.com
or call
800-448-6848

For local contact visit:
www.hunter.com/contact-hunter


Form 6492-T, 06-15
Supersedes Form 6492-T, 08-13a
Copyright © 2015, Hunter Engineering Company

RX16FT-IS

Flush Mount Lift Rack

HUNTER
Engineering Company

SPECIFICATIONS (Refer to 6367-T for substructure construction requirements)

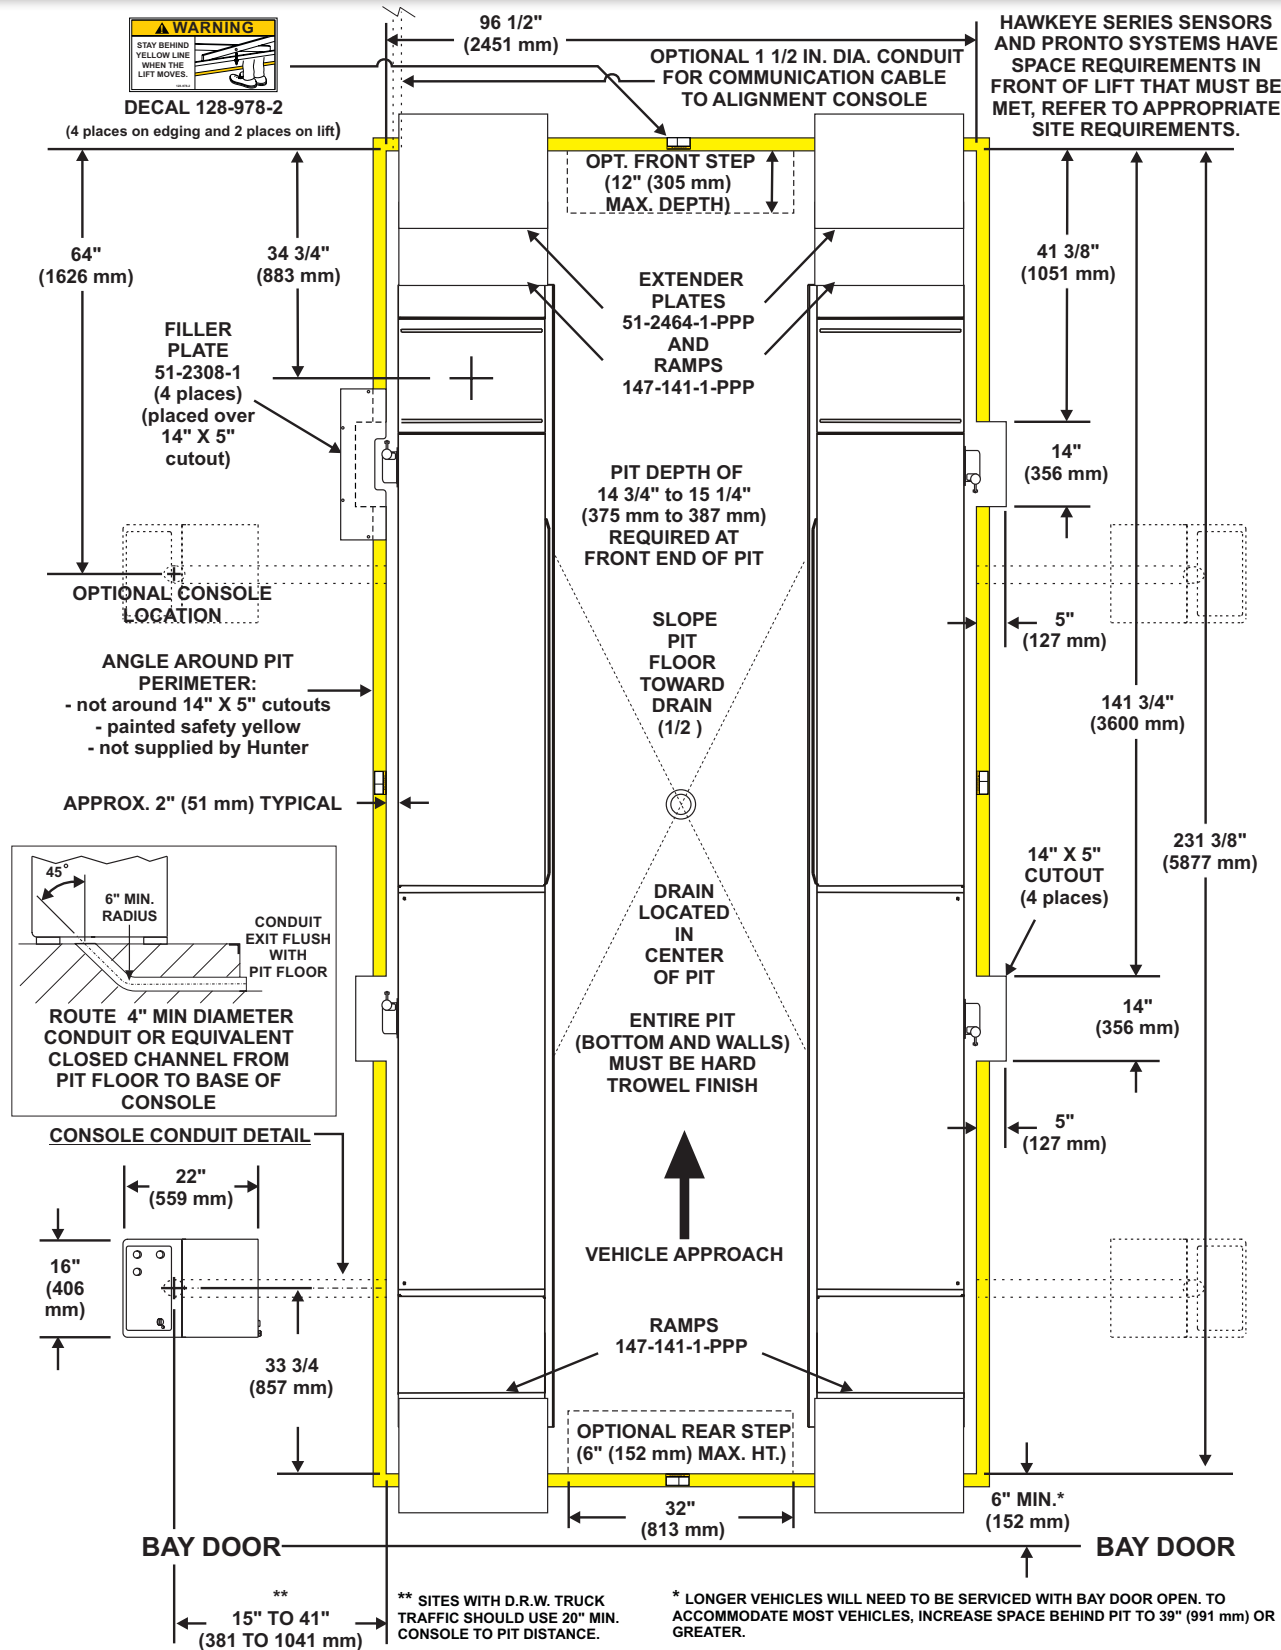

*Non-standard positioning of control console is limited to a maximum space between console and rack of 6 feet (1829 mm) at the approach ramp end and 17 feet (5182 mm) at the turnplate end. Additional threshold and perhaps hydraulic hoses will be required (refer to Installation Instruction for details)..

All dimensions shown are for finished pit. Accomodate tile thickness as needed.