


# RX10LFT-IS

## Flush Mount Lift Rack

**HUNTER**  
Engineering Company

### SPECIFICATIONS

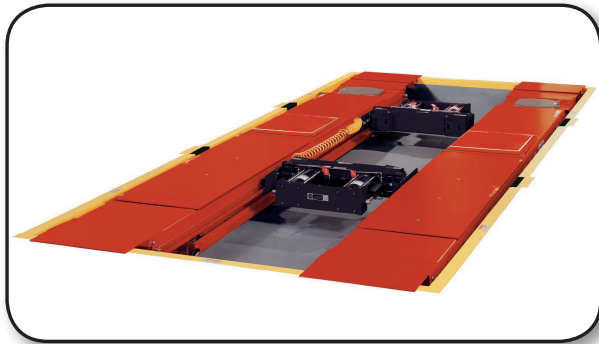

RX10LFT-IS Shown

#### Site Specifications

Substructure Requirements	Refer to 6199-T for full details
Power Requirements	208-230 VAC, single phase power, 26 Amp
Air Supply Requirements	90-150 PSI (6.2-10.3 bar) Jacks require 125 PSI (8.6 bar) for full capacity
Minimum Concrete Spec.	3 in. (76 mm) thick, 3000 PSI (20,700 kPa) rating
Maximum Floor Slope	2 in. (51mm) over 126 in. (3200 mm)


#### Product Specifications

Max. Vehicle Weight	10,000 lbs. (4536 kg)
Max. Wheelbase	
General Service	180 in. (4572 mm)
Two-Wheel Alignment	175 in. (4445 mm)
Four-Wheel Alignment	158 in. (4013 mm)
Alignment Height	All lock positions
Min. Four-Wheel Alignment	88 in. (2235 mm)
Lifting Speed	55 seconds
Lowering Speed	25 seconds

### MODEL FEATURES / DIMENSIONS

Feature	FT-IS
6000-lb Swing Air Jacks (2)	✓
<b>FIA</b> Fully Integrated Alignment	✓
<b>POWER SLIDE</b>	✓
<b>INFLATION STATION</b>	✓
Two-Speed Lowering	✓

Dimension	
Outside Width ( <b>W1</b> )	88.5 in. 2248 mm
Inside Width ( <b>W2</b> )	40 in. 1016 mm
Length ( <b>L</b> )	228.375 in. 5801 mm
Runway Width ( <b>R</b> )	24 in. 610 mm
Raised Height ( <b>H1</b> )	72 in 1829 mm
Depth ( <b>H2</b> )	9.25 to 10.25 in. 235 mm to 260 mm

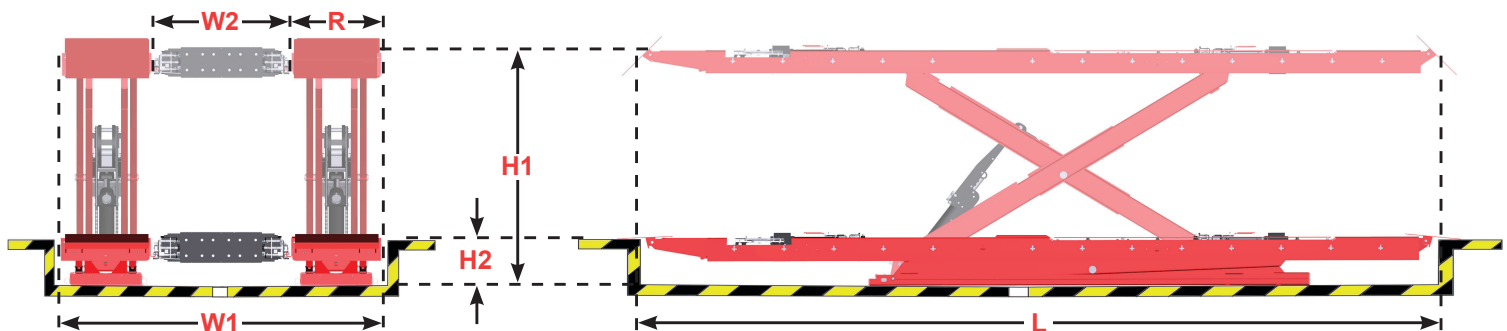

Continued on Page 2

For lift rack information visit:  
[www.hunter.com/lift-racks](http://www.hunter.com/lift-racks)

For general inquiries visit:  
[www.hunter.com](http://www.hunter.com)  
or call  
800-448-6848

For local contact visit:  
[www.hunter.com/contact-hunter](http://www.hunter.com/contact-hunter)


Form 6497-T, 06-15  
Supersedes Form 6497-T, 12-12a  
Copyright © 2015, Hunter Engineering Company

# RX10LFT-IS

## Flush Mount Lift Rack

**HUNTER**  
Engineering Company

**SPECIFICATIONS (Refer to 6199-T for substructure construction requirements)**

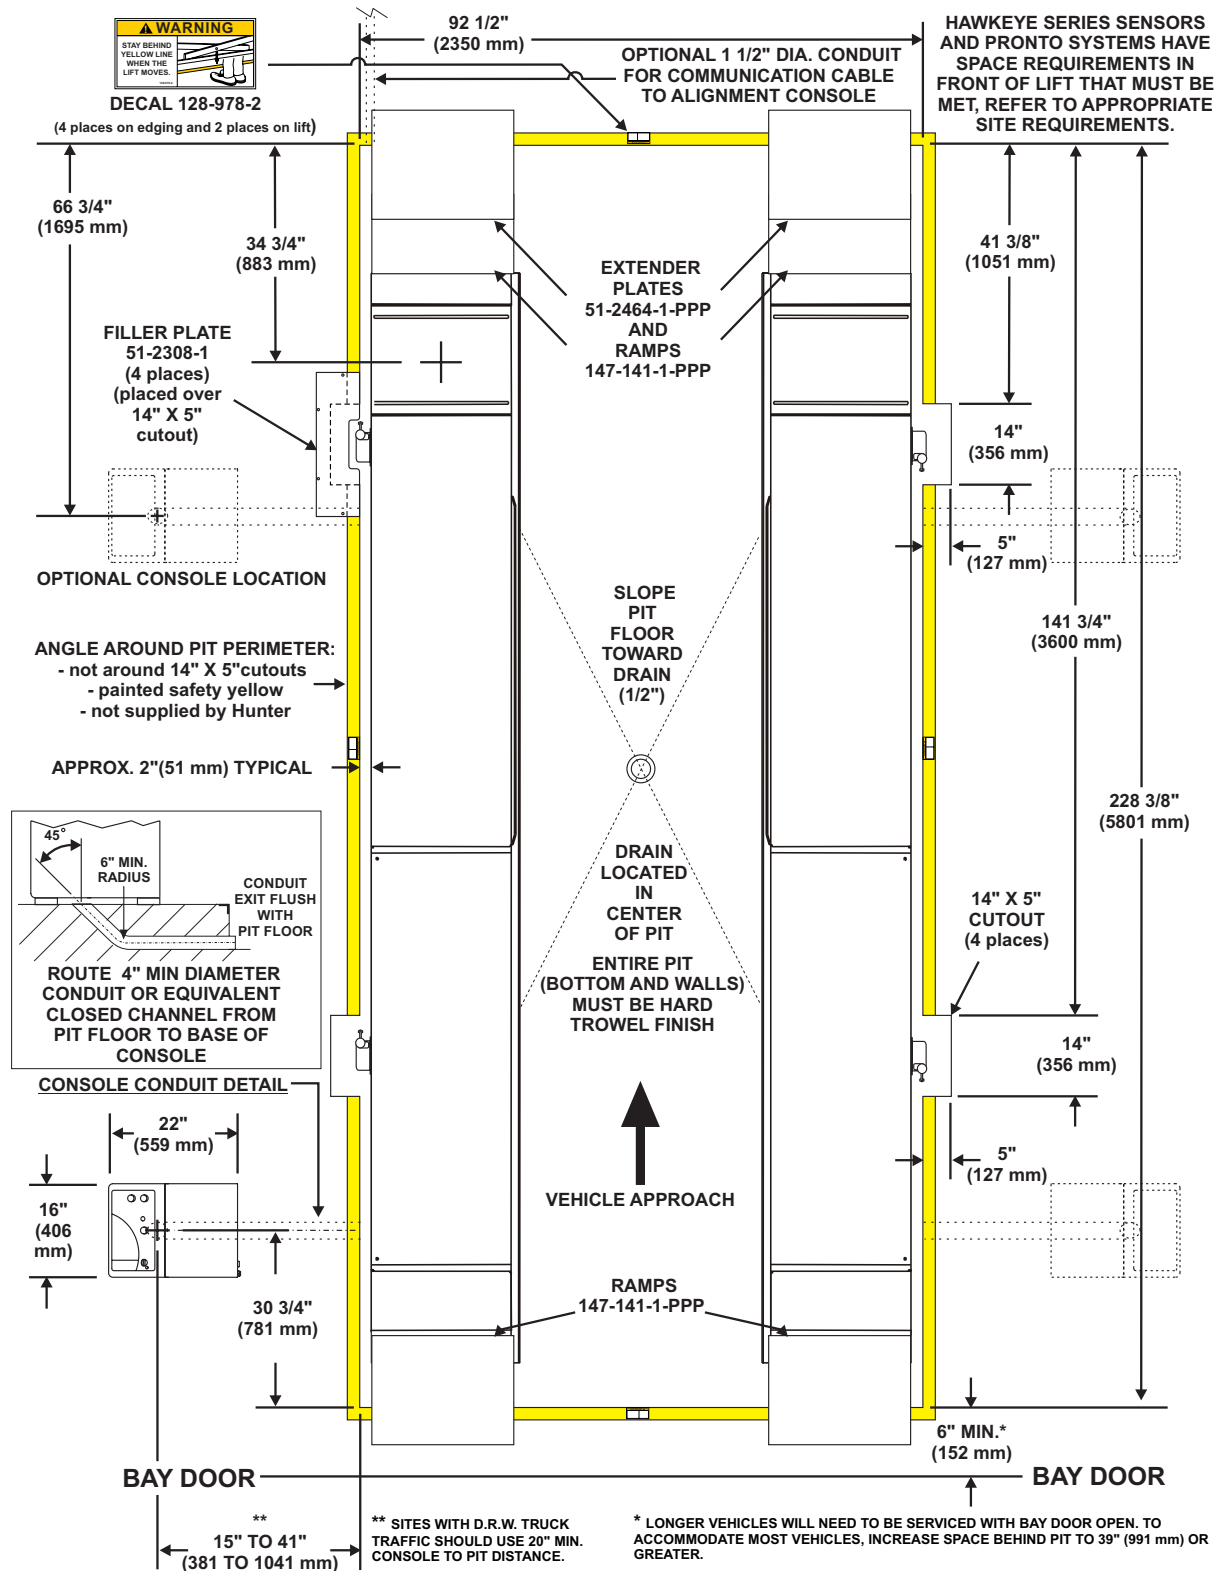

Dimensions shown are for finished pits. Tile thickness (if applicable) must be considered before pouring pit.

\*Non-standard positioning of control console is limited to a maximum space between console and rack of 6 feet (1829 mm) at the approach ramp end and 18 feet (5486 mm) at the turnplate end. Additional threshold and perhaps hydraulic hoses will be required (refer to Installation Instruction for details).