



# OPTIONAL LIFT ACCESSORIES

## Increase bay productivity with these two-post lift accessories

### FA Flip-Up Adapter for 3-Stage TRIO™ Arms

Standard three-position flip-up adapter is perfect for quick positioning on a variety of pick-up points.



**KIT #T100274** for 10,000 lbs. (4536kg) capacity lifts

### RA Adapter for 3-Stage TRIO™ Arms

**KIT#T100272** Set of four (4) FJ6219 polymer pad round adapters. 10,000 lbs. (4536kg) capacity adapters thread-up to allow protection of the vehicle underbody components or undercoating for no metal to metal contact. For use when lifting uni-body construction vehicles. Also available for use with stackable inserts.



#FJ6219

### RA Adapter for Conventional 3-Stage Arms

Set of four (4) FJ6202 polymer pad round adapters. **KIT #FJ6225** for 10,000 lbs. (4536kg) capacity lifts

### TA Thread-Up Adapter for 3-Stage TRIO™ Arms

Auxiliary adjustable thread-up truck adapter adapter with rubber pads allow for protection of underbody vehicle components or undercoating. For raising certain vans or pickups. Also available for use with stackable inserts.



#T110564

**KIT #T100273** includes (4) T110564 adapters Required use when lifting trucks and other frame vehicles. For 10,000 lbs. (4536kg) capacity lifts

### TA Thread-Up for Conventional 3-Stage Arms

Auxiliary adjustable thread-up adapter with rubber pads. **KIT #FJ6197** includes (4) FJ6214 adapters for 10,000 lbs. (4536kg) capacity lifts

### Adapter Extensions

Provides additional lifting height when vehicles require additional clearance or use on front or rear to level vehicle on lift. Includes four 3 1/2" (89mm) and four 5" (127mm) adapter extensions, mounting rack and hardware.

**Adapter kit #T100271** fits TRIO models SPOA10 RA / TA



**Adapter kit #FJ7880BK** fits models SPO10 RA / TA and SPO12TA

### Adapter and Mounting Rack

Required for raising minivans with running boards. Includes four adapters, mounting rack and hardware.

- Adjustable range provides 4 7/8" (124mm) to 6 3/4" (171mm) additional height
- Capacity 1,750 lbs. (794k) per adapter
- Rubber contact surface protects undercoated surfaces



#FJ6137BK

### Auxiliary Adapters

Auxiliary adapters for use when raising certain vans or pickups. Includes four adapters, mounting rack and hardware.

- 2,500 lbs. (1134kg) capacity per adapter
- Adds 14 3/8" to 17 3/8" of additional overall adapter height (365 - 441mm)



#FJ6115BK

Adds 9 3/8" (238mm) of height - includes (4) 14 3/8" / 365mm adapters

#FJ6212KITYL - shorter version  
Adds 7 3/8" (187mm) of height - includes 4 adapters

#FJ6195YL

Adds 12 3/8" (314mm) of height - includes 2 adapters

### Extended Height Adapter

Required to lift 1988 or newer General Motors® GMT400 pickup trucks. Includes four adapters, mounting rack and hardware.

- Capacity 2,500 lbs. (1134kg) maximum per adapter
- Maximum overall height: 14" (356mm)




#FJ6133BK

### Polymer Pad Adapter Kits

Polymer pad adapters for use with new car undercoating. Includes four adapters, mounting rack and hardware.

- 2,500 lbs. (1134kg) capacity per adapter
- Rubber contact surface protects undercoated surfaces

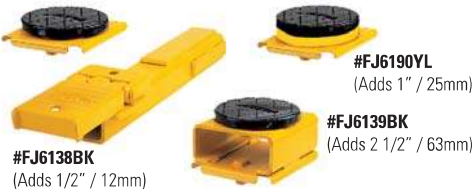

#FJ6190YL

(Adds 1" / 25mm)

#FJ6139BK

(Adds 2 1/2" / 63mm)

#FJ6138BK  
(Adds 1/2" / 12mm)

### Adapters and Organizer Rack

Accommodate more vehicles quickly and easily with more adapters plus keep them organized.

- Four FJ696, four FJ697 and four FJ698 adapters
- Two piece column or wall-mounted adapter organizer rack (FJ6108)

Also available in different configurations.

**CONSULT FACTORY FOR OPTIONS**



#FJ6100BK

### Air / Utility Box

Mounts easily on any column and provides quick access to utilities

- Two 110v electric outlets and air connection
- The filter/regulator/lubricator helps extend the life of your air tools

#FA5911BK



### Tool Holder

To keep tools handy for the technician, this patented tool holder keeps air guns, torque sticks, and other tools within easy reach. This accessory mounts easily in holes already drilled and tapped in the two-post column.

#FA5191EBK



### Extended Height Kits

Raise the overhead clearance on 10,000 and 12,000 lbs. capacity two-post lifts to service more vehicles at a comfortable working height. Kit includes column extensions and hardware.

**CONSULT FACTORY FOR OPTIONS**



### Jack Stands / 4,000 lbs. CAPACITY

The lift certified RS4 jack stand provides added assurance of vehicle lift safety.

Maximum height: 84" (2133mm)  
Minimum height: 55 1/2" (1410mm)  
Fine thread-up height: 1 5/8" to 7 1/8" (41mm to 181mm)



#RS4

### MW-200 Tire Lift

200 lbs. capacity air operated tire and wheel lift. Provides maneuverability and adjustable lifting and lowering speeds.

- Quick transfers to tire balancers
- Easy positioning of the tire / wheel
- Includes air hose and auxiliary air tool connection



#MW-200

### #MW-500

500 lbs. capacity model available

### Wheel Wing™ Tire Arm

Handy for tire rotations and brake jobs, the 100 lbs. capacity Wheel Wing tire arm mounts easily on any column arm and holds a tire at lift arm height. Folds away when not in use.

- Adjustable to fit various lift arms
- Includes set of 2 arms, 2 magnetic lug nut dishes, shims



#FA5974

### Door Defender™

The door defender is a low profile solid rubber guard designed to fit over the two-post lift carriage. Allows technicians to easily enter and exit the vehicle without vehicle damage.

Includes one (1) padded defender, and adhesive.

#N823



### Column Base Plate Cover

Refresh your shop's appearance with a unique accessory from Rotary Lift designed to cover the base plates on popular two-post lift models. Keep mounting hardware hidden, safely enclosed and protected. Base plate covers fit standard Rotary Lift SPOA10, SPOA9 and SPOA7 (200 series and above) lifts.



#N539


Accessories shown may be used with most frame contact models. Accessories for FA adapters fit any surface mounted, frame engaging Rotary Lift manufactured since October of 1973. Consult your Rotary Authorized Distributor for more information concerning these accessory options.

### Lock Light™ - patent pending

Provides an instant green light visual confirmation when lift is **lowered to its locks**. Compatible with most surface and high-pressure lifts that use an electric/hydraulic power unit providing an unused pressure port is available.

Kit includes:

- Indicator light assembly
- Pressure switch
- Mounting bracket
- 10' of electrical wire

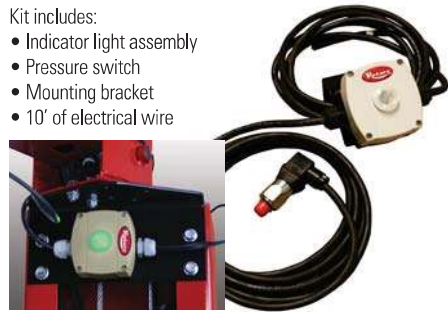

#FA834 / 110V  
#FA835 / 220V

### TECH LIGHT™ Line Light 2

Attach the 2 ultra slim light wands to columns for effective, efficient 2-post lighting where you need it.

Supplied with 4 magnetic clips for easy positioning.

Includes:

- (2) 96 LED lights with 25' of cable and 20W power supply
- 3" spiral cords - stretches to 16" for placement under vehicle
- Magnetic junction box
- Input voltage 100-240 V AC



#FA5701

### TECH LIGHT™ Line Light R

Rechargeable LED inspection hand lamp with top spot light. Supplied with flexible suspension clips holder with both hook and magnet for positioning the light exactly where you need it

Additional suspension solutions available as accessories.

- 180 lumen in main light operates for up to 3 hours
- 120 lumen in spot light operates for up to 6 hours
- 4 hour charging time



#FA5702

## TWO-POST STANDARD / OPTIONAL LIFT FEATURES

FEATURE	Standard Feature ●	Optional Feature ○	AT07 7,000 lbs.	SPOA7 7,000 lbs.	SP010 10,000 lbs.	SPOA10 10,000 lbs.	SP012 12,000 lbs.	SP015 15,000 lbs.	SP018 18,000 lbs.
	Lift column design			Asymmetric	Asymmetric	Symmetric	Asymmetric	Symmetric	Symmetric
ALI Certified			●	●	●	●	●	●	●
Surface mounted models			●	●	●	●	●	●	●
<b>SHOCKWAVE™</b> Equipped models			N/A	○	○	○	○	N/A	N/A
3-stage TRIO™ arms			N/A	N/A	N/A	●	N/A	N/A	N/A
Conventional 3-stage arms			N/A	N/A	○	N/A	●	N/A	N/A
Multiple contact / adapter options			○	N/A	○	○	N/A	N/A	N/A
3-phase power units			○	○	○	○	○	○	○
Single point lock release			●	●	●	●	●	●	●
Multi-position locking systems			●	●	●	●	●	●	●
Original single piece "Double S" column construction			N/A	●	●	●	●	●	●
Hydraulic cylinders in each column			●	●	●	●	●	●	●
Overhead cables / clear floor design			●	●	●	●	●	●	●
Seismic rated column baseplate			N/A	○	○	○	N/A	N/A	N/A
Adjustable narrow column width			N/A	N/A	○	○	N/A	N/A	N/A
Adjustable wider column width			N/A	N/A	N/A	N/A	○	N/A	N/A
Extended higher rise option			N/A	N/A	○	○	○	N/A	N/A
Extended overhead height options			N/A	N/A	○	○	○	N/A	N/A
Low ceiling model available			N/A	N/A	N/A	N/A	○	○	○
Automatic arm restraints			●	●	●	●	●	●	●
Overhead padded switch bar			●	●	●	●	●	●	●
Multi-position wheel spotting dish			●	●	●	●	●	●	●