

SM30 30,000 LBS. CAPACITY RUNWAY LIFT

SERVICE A VARIETY OF VEHICLES WITH MAXIMUM PRODUCTIVITY

Heavy-Duty 30K Four Post Drive-On Lifts - Service Wheelbases Up To 307"

Take heavy duty lift service to the next level with this four-post designed without side obstructions and better vehicle access. With a 68" lifting height, the SM30 clear floor design allows technicians room to access tool boxes and other shop equipment increasing productivity and reducing downtime. Plus, the single point air-lock release releases all four spring loaded column locks at one time adding greater productivity. Numerous accessories turns this lift into a complete service solution for any shops' needs. These lifts handle cars, vans, trucks - even light and medium duty commercial vehicles with ease. If you service a wide variety of vehicles, Rotary 30,000 lbs. capacity four-post auto lifts are the right choice for maximum productivity.



Shown: SM30N0-X
30,000 lbs. capacity
with optional rolling jacks

RAISE YOUR FORKLIFT TO NEW HEIGHTS!

RFL25

25,000 LBS. CAPACITY FORKLIFT SERVICE LIFT


Features

- Single point release air-locks
- Automatic ramp chocks
- Drive through models
- ALI / ETL Certified



Shown: RFL25
Fork Lift Model
25,000 lbs. capacity

CONSULT FACTORY FOR DETAILS

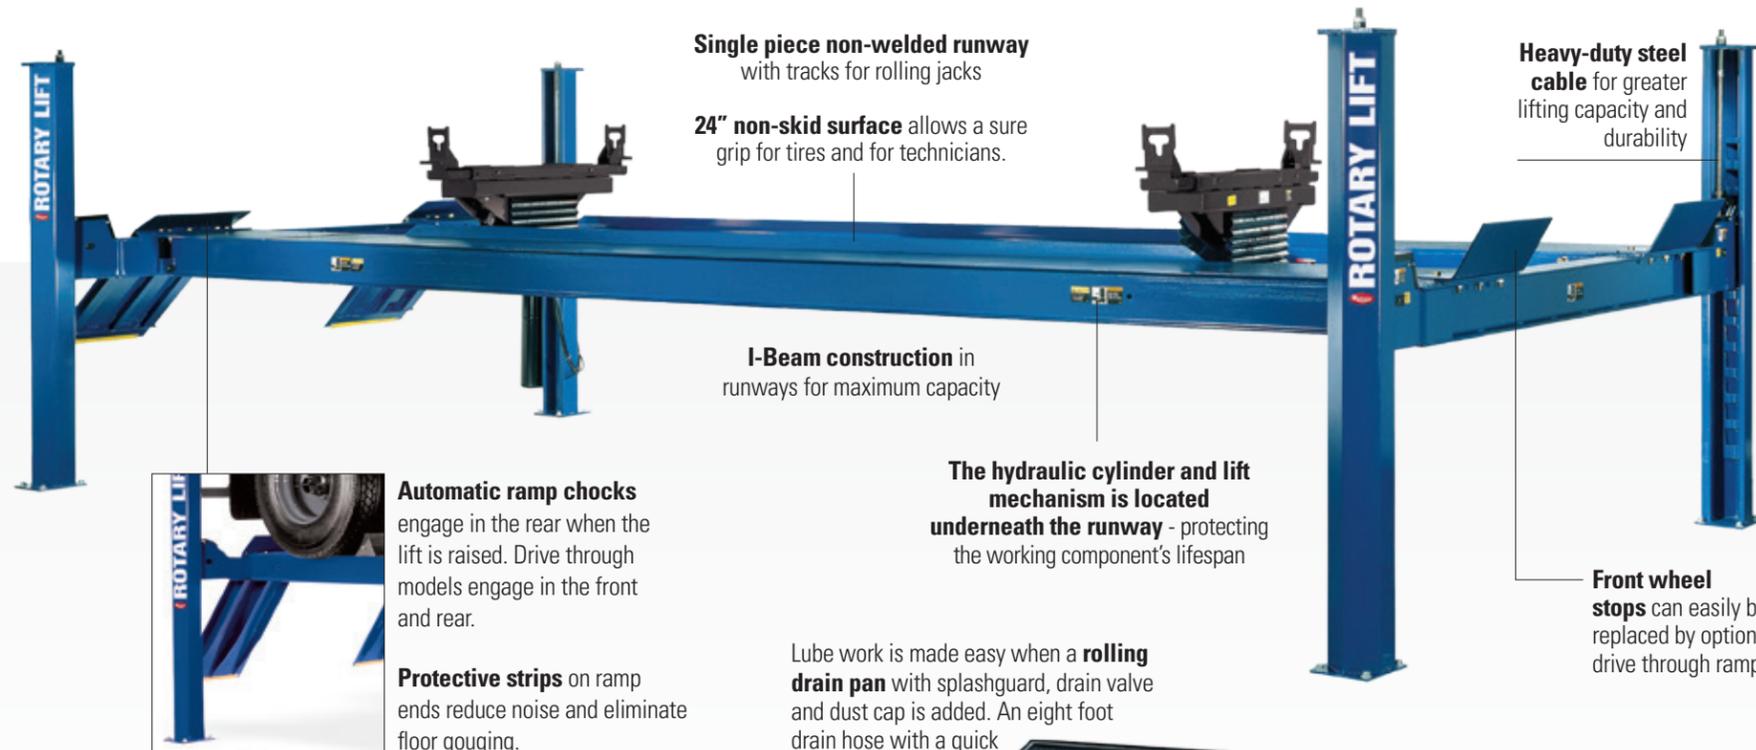

Single piece non-welded runway
with tracks for rolling jacks

24" non-skid surface allows a sure grip for tires and for technicians.

I-Beam construction in runways for maximum capacity

The hydraulic cylinder and lift mechanism is located underneath the runway - protecting the working component's lifespan

Lube work is made easy when a **rolling drain pan** with splashguard, drain valve and dust cap is added. An eight foot drain hose with a quick disconnect fitting is also available.



#FC5968BK
SM300 series, 30 gallon capacity

Heavy-duty steel cable for greater lifting capacity and durability

Front wheel stops can easily be replaced by optional drive through ramps

Optional rolling jacks with a variety of adapters lift front, rear or all wheels off the runways for brake, tire, alignment and suspension work. When idle, the jacks roll out of the way to provide unobstructed workspace between runways.



Shown: RJ9000Y-2BK

Standard Internal airline connections let two rolling jacks operate simultaneously.

Alignment Capable Lift
Convert the SM30 into a fully functioning alignment lift by adding an alignment kit. Bolt-on kits include front turning radius gauge kits and rear slip plates.

Rotary DESIGN ADVANTAGE

SM30 Four-Post


PRODUCTIVITY & PERFORMANCE

1. PATENTED SENTINEL LOCKING SYSTEM
2. MULTIPLE RUNWAY LENGTHS
3. ADJUSTABLE RUNWAY SPACING
4. THIRD-PARTY ETL GOLD CERTIFIED

SM30 LIFT SPECIFICATIONS

Model:	SM30S SM30L SM30EL
Maximum Wheelbase*	S 235" (5969mm) L 271" (6883mm) EL 307" (7798mm)
A. Rise / Floor to top of runway	68" (1727mm)
B. Length Overall	S 25' 8 1/8" (7826mm) L 28' 8 1/8" (8741mm) EL 31' 8 1/8" (9655mm)
C. Width Overall	12' 6" (3811mm)
D. Inside of Columns	133" (3378mm)
E. Between Columns	S 249" (6325mm) L 285" (7239mm) EL 321" (8153mm)
F. Height of Columns	7' 3/4" (2153mm)
G. Width of Runways	24" (610mm)
H. Height of Runways	8 3/4" (222mm)
I. Width Between Runways (min.)	42" (1067mm)
J. Width Between Runways (max.)	48" (1219mm)
K. Length of Runways	S 248 1/2" (6312mm) L 284 1/2" (7226mm) EL 320 1/2" (8141mm)
Lifting Capacity	30,000 lbs. (13608kg)
Motor	4 HP
Voltage Single Phase †	208v-230v
Time of Full Rise	105 seconds
Min. Bay Size	S 16' x 30' (4877 x 9144mm) L 16' x 33' (4877 x 10059mm) EL 16' x 36' (4577 x 10973mm)

S = Shorter length **L** = Standard length **EL** = Extended length



† Optional 3-phase electrical available

Standard color of lifts are blue and red. Additional colors maybe available - consult your Rotary® representative for details and pricing.

RAL5005 RAL3002

